


The Stella Doradus Smart Omni Antenna has an integrated white LED which lights up when the cable connectors are correctly assembled. It assures the installer and client that the cables are correctly made and the antennas are emitting signal.




They can also be remotely monitored on the Stella Control platform. The client and installer can remotely log into their repeater on the stella control platform and check that all ports on the repeater are connected correctly to the indoor antennas.

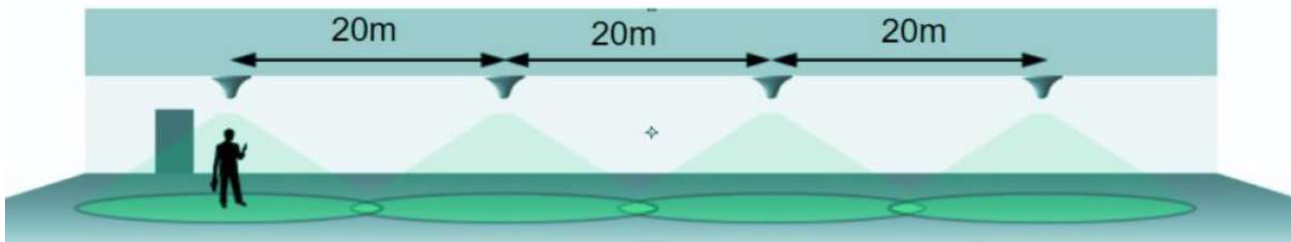


<b>Description</b>	<b>Indoor 6 Band ceiling mount antenna</b>
<b>Code</b>	<b>OMNIANT-DOME-NF</b>
Frequency range	698-960 & 1710-2700 & 3500MHz
Gain	3dBi
Smart antenna	LED
PIM	28dBm
VSWR	<1.5
Polarization	Vertical
Horizontal Beamwidth	360°
Impedance	50 Ohm
Input Power	50W
Connector	N-female
Dimensions	18.5 x 9.5cm
Cover	ABS


700MHz Vertical

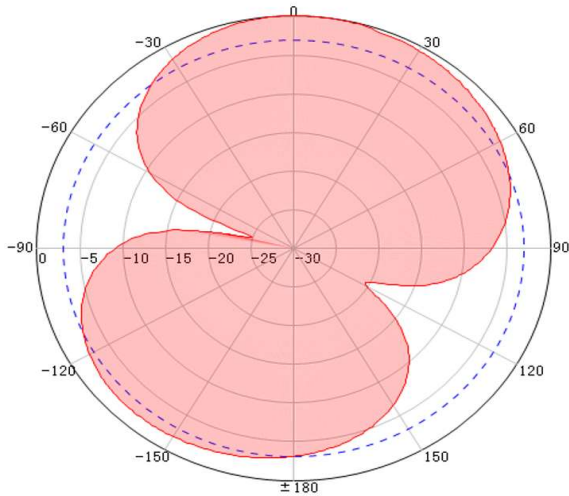


800MHz Vertical

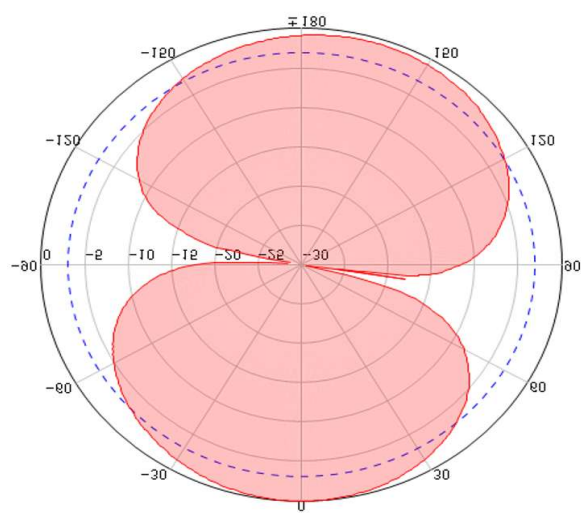


960MHz Vertical

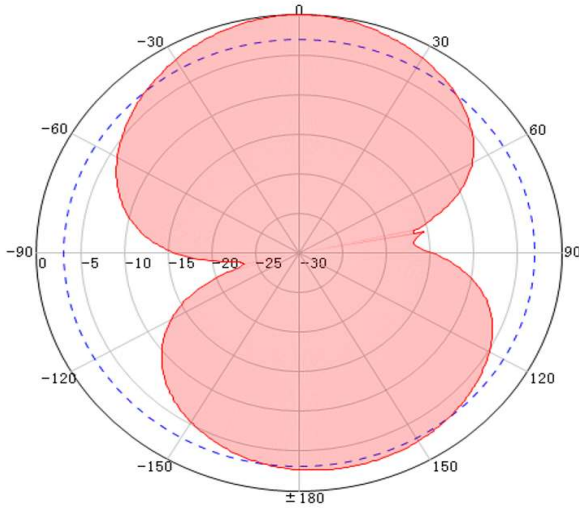


1800MHz Vertical

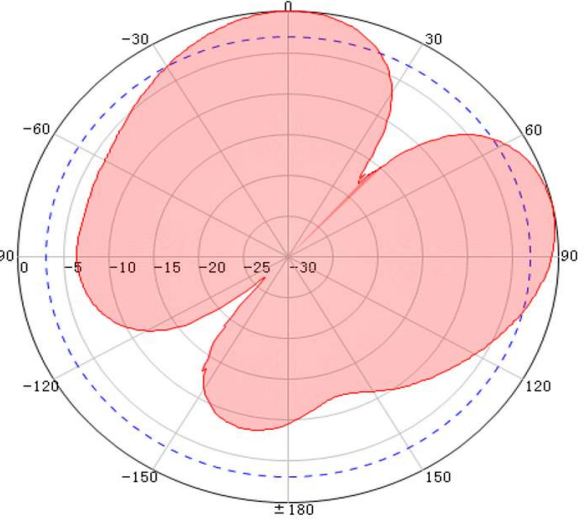


2100MHz Vertical

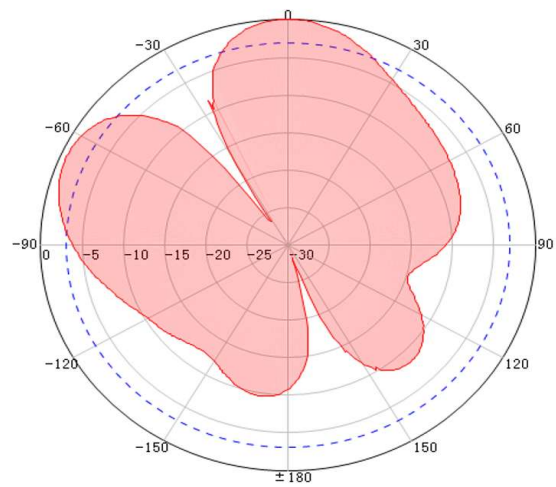


2600MHz Vertical

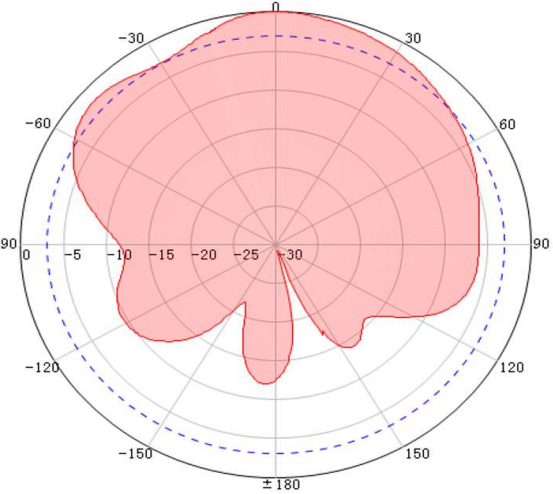


700MHz Horizontal

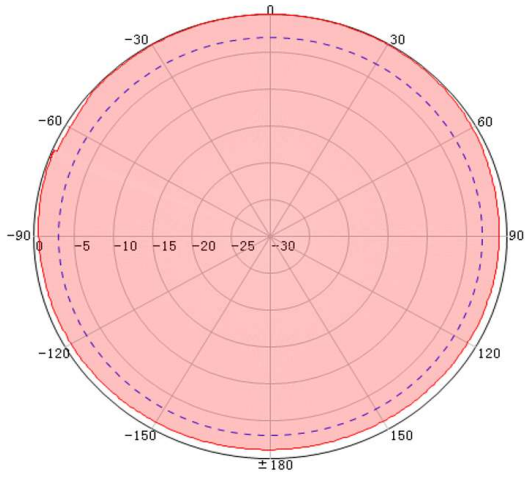


800MHz Horizontal

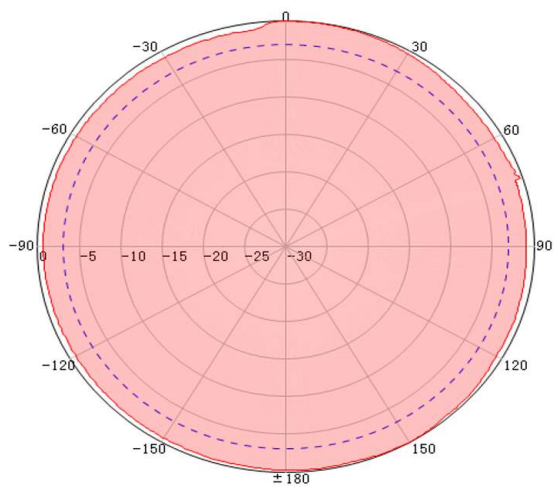


960MHz Horizontal

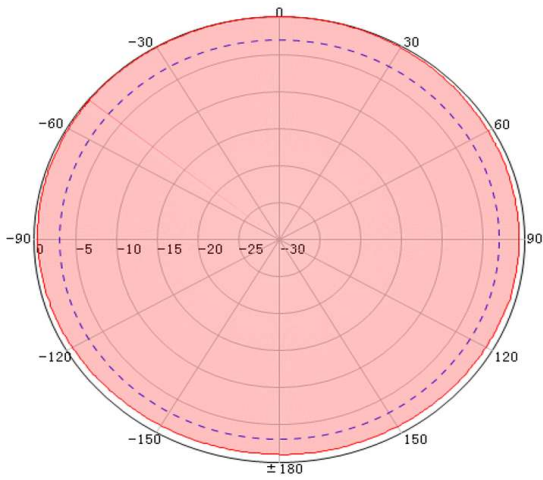

1800MHz Horizontal

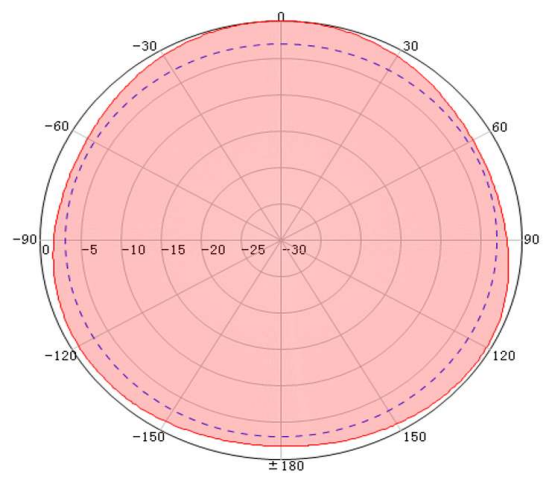

2100MHz Horizontal

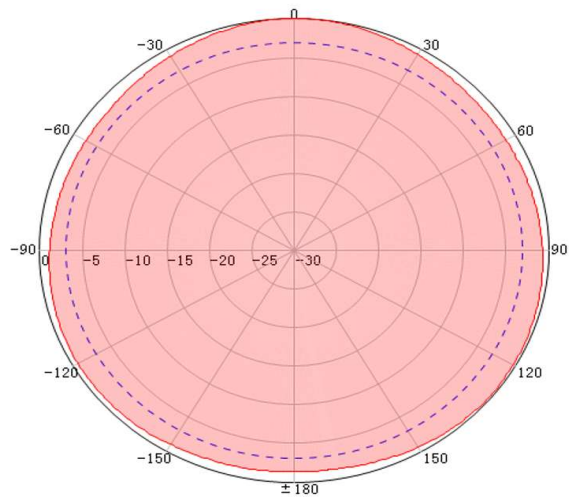

2600MHz Horizontal

